


⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

The product styles you received

First style: finished product with power cord

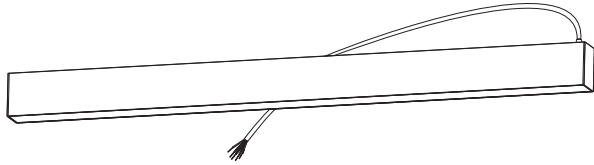

Second style: finished product with separate power cord



Finished product without power cord



Power cord kits

Third style: semi-finished product



Housing



End caps




Down led module



Power cord kits


3.8" Width Linear

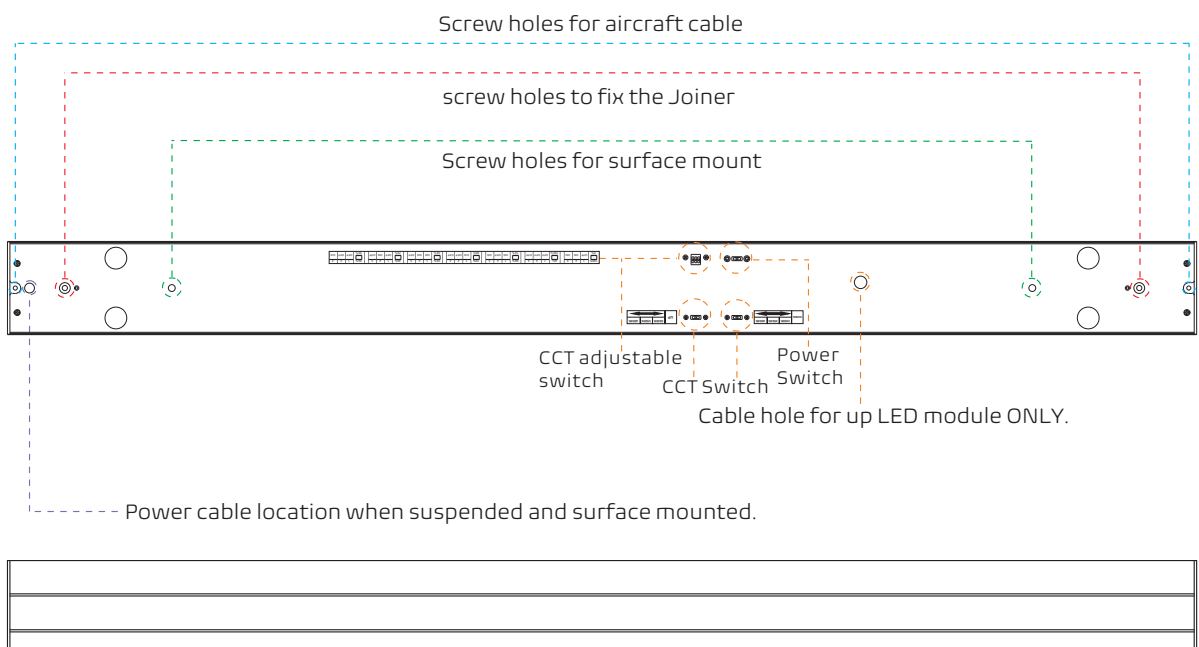


3.8" Width PENDANT LED ARCHITECTURAL LED LUMINAIRE DRY CEILING

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

▶ POWER FEED

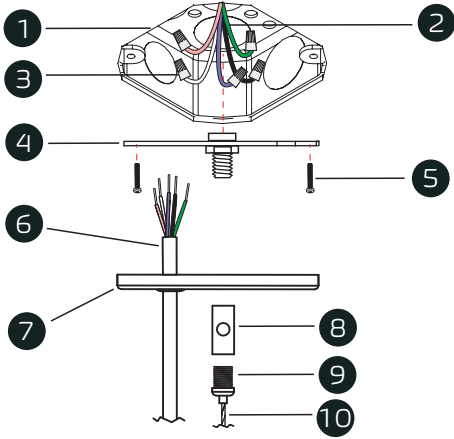


▶ NON POWER SUSPENSION

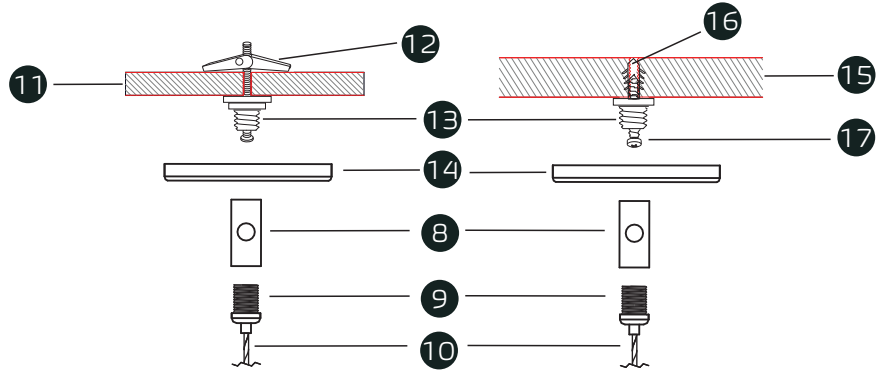


▶ PARTS LIST


- 1 4" Octagon Junction Box (By Others)
- 2 Power Cord (By Others)
- 3 Wire Nut
- 4 Junction Box Crossbar
- 5 Screw PM4*22
- 6 Power Cord
- 7 4" Power Canopy Kit
- 8 Cable Holder
- 9 Strain Relief Thread Nut
- 10 Aircraft Cable
- 11 Drywall Ceiling (By Others)
- 12 Butterfly Drywall Anchor
- 13 Crimp Stud
- 14 2" Canopy
- 15 Solid Ceiling (By Others)
- 16 Anchor
- 17 Screw PA4*30




Wire Nut




Junction Box Crossbar




Screw PM4*22




Power Cord




4" Canopy Power Kit




Cable Holder




Strain Relief Thread Nut




Aircraft Cable



Butterfly Drywall Anchor



Crimp Stud



2" Canopy



Anchor




Screw PA4*30


3.8" Width PENDANT LED ARCHITECTURAL LED LUMINAIRE DROP CEILING

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

▶ POWER FEED

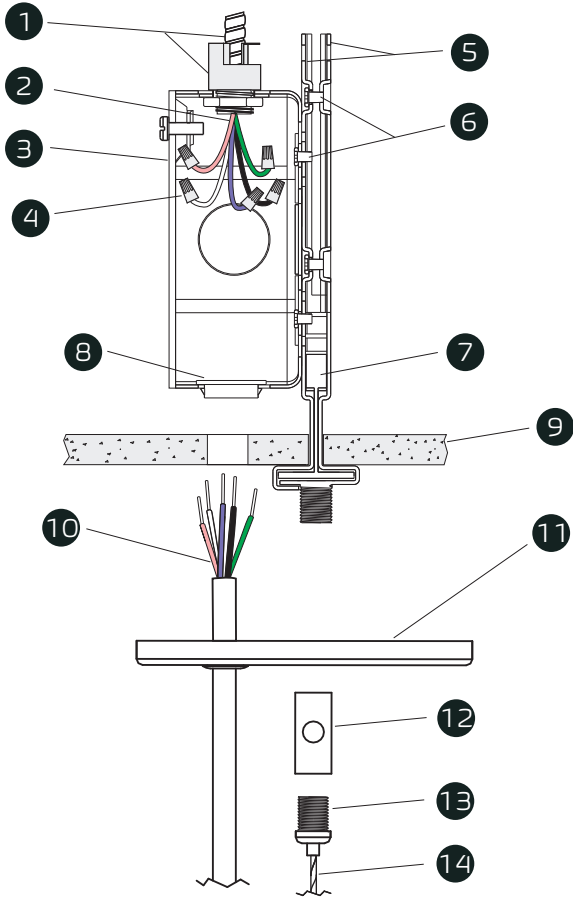


▶ NON POWER SUSPENSION

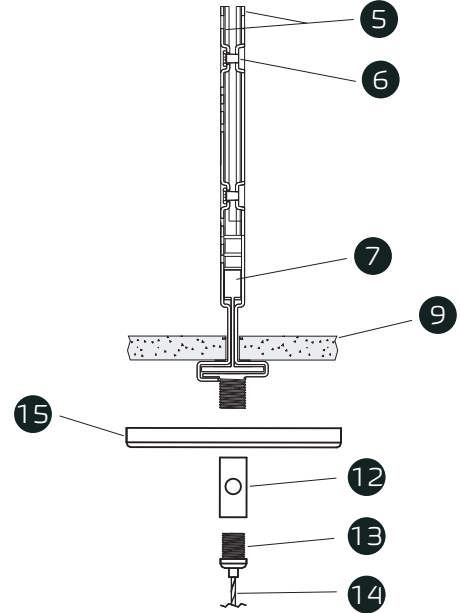


▶ PARTS LIST


- 1 Armored Cable & Connector (By Others)
- 2 Branch Conductors (By Others)
- 3 4" Octogon Junction Box
- 4 Wire Nut
- 5 Assembled T-grid Clips
- 6 Screw 6#*4
- 7 T-grid (By Others)
- 8 Listed Cord Bushing (By Others) suitable for the cord size and the outlet box opening.
- 9 Ceiling Tile (By Others)
- 10 Power Cord
- 11 4" Canopy Power Kit
- 12 Cable Holder
- 13 Strain Relief Thread Nut
- 14 Aircraft Cable
- 15 2" Canopy




4" Octogon Junction Box




Wire Nut




Assembled T-grid Clips




Screw 6#*4




Listed Cord Bushing




Power Cord




4" Canopy Power Kit




Cable Holder



Strain Relief Thread Nut



Aircraft Cable



2" Canopy

3.8" Width PENDANT LED ARCHITECTURAL LED LUMINAIRE INDEPENDENT INSTALLATION


⚠️ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT


1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT(1200CM) in 120AC, 80FT (2400CM) in 230AC, 100FT(3000CM) in 277AC.

SHOCK HAZARD

⚡ May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.



WIRING

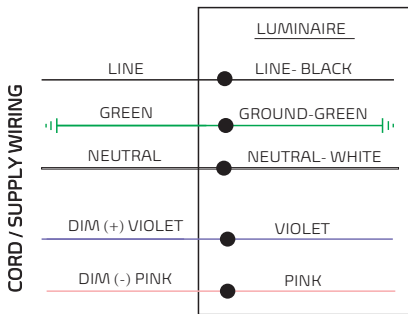


⚠️ Please isolate two dimming wires by P2 terminal individually if no need dimming; **MUST connect wires with corresponding colors as shown.**

PRE-INSTALLATION

Assemble Luminaire

1. Insert the cord holder into the power code location as shown.
2. Thread the power code into the cord holder as shown, and secure the LED modular to housing with safety cable.
3. Wiring
Must connect connectors with corresponding colors as shown.
(The green ground wire is connected with a wire nut. Insert the yellow male and female to connect the black and white AC wire. Insert the orange male female to connect the purple, pink dimming wires.)
4. Fix the power code with holder nut. Insert the LED modular into housing, then install the end cap into housing with screws.


INDEPENDENT INSTALLATION

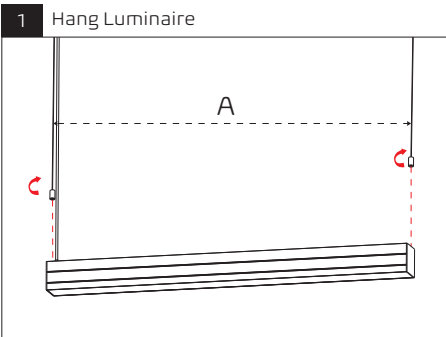

Screw both bottom parts of aircraft cables clockwise and secure them on the top of housing making sure they hang the lights.

Note: Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.

| Nominal Length | 3.8" Width Linear (Diffuser, Regress, Wall Wash) |
|----------------|--|
| | "A" Suspension Points Distance (Feet) |
| 2 ft. | 1.92' |
| 3 ft. | 2.92' |
| 4 ft. | 3.92' |
| 8 ft. | 7.88' |

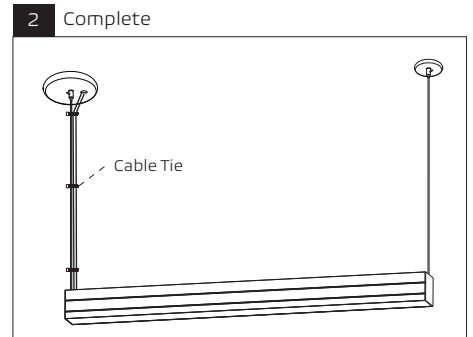

Use the cable tie to keep the electric wire going up along with the wire rope.

3.8" Width PENDANT LED ARCHITECTURAL LED LUMINAIRE MULTIPLE LUMINAIRES CONNECTION

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


JOINER OPTIONS



Line Joiner

BEFORE CONNECTING

Disassemble Luminaires

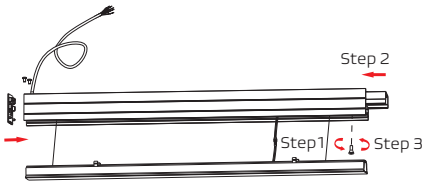

Start of run (SoR):

Beginning at one end, install power cord, first end cap and line joiner, secure the led modular to housing with safety cable.



Middle of run (MoR):

Install line joiner, secure the led modular to housing with safety cable.




End of run (EoR):

Install the end cap to the end of fixture, secure the led modular to housing with safety cable.

LINE CONNECTION

1 Install aircraft cable

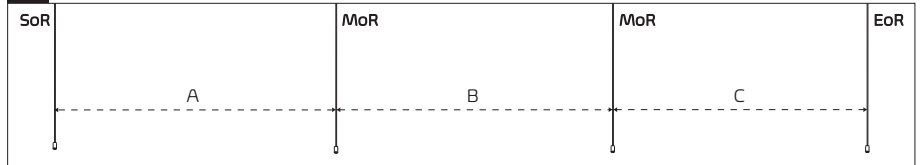

| Nominal Length | 3.8" Width Linear | | |
|----------------|-------------------------------|-------------------------------|-------------------------------|
| | "A" Distance of SoR to MoR | "B" Distance of MoR to MoR | "C" Distance of MoR to EoR |
| | Feet | Feet | Feet |
| 2 ft. | 1.94' | 1.96' | 1.94' |
| 3 ft. | 2.94' | 2.96' | 2.94' |
| 4 ft. | 3.94' | 3.96' | 3.94' |
| 8 ft. | 7.90' | 7.92' | 7.90' |

2 Hang luminaire and wiring - SoR

▲ Adjust the height of luminaire.
Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which allows the luminaire down.

2-1: Screw both bottom parts of aircraft cables clockwise and secure then on the top of housing making sure they hang the lights.
2-2: Connect AC power.

3 Repeat Hang and join steps - MoR to EoR

Cable Tie


Wiring
Must connect connectors with corresponding colors as shown.

3-1: Zip tight power cord & aircraft suspension cable with the cable tie every 7.5cm.

3-2: Connect the quick connectors properly.

3-3: Insert all the LED Modules into the housing from SoR to EoR in turn.

4 Complete

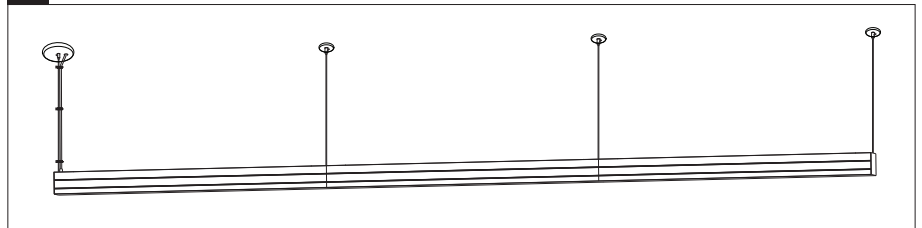

Optional 42' Continuous Rolling Lens

Diffuser (Optional Accessories)
Optional continuous roll-out lens which can reach seamless continue runs up to 42' is available. Diffuser must fully enclose the LED Module compartment.