

Floating Air Troffer


CCT & Wattage Adjustable Version



The indirect LED troffer offers a traditional modern design with the latest lighting technology. Transparent optics engineered specifically for LED sources are integrated with minimalist design and architectural materials to create a broad range of solutions with superior optical and energy performance. High performing optics allows for maximum energy savings and optimal illumination in a ultra-minimalistic shallow recessed fixture, provides a unique translucent appearance without sacrificing performance. It is architectural recessed lighting solution that compatible for commercial and institutional environments, including office building, medical, health, educational, retail, hotel, airport, hospitality, etc.

Feature


- Available in 1x2ft, 2x2ft and 2x4ft sizes
- Transparent optics
- 0-10V dimming, dim to 10% or 1% options
- Wattage selectable, 110lm/w
- CCT adjustable from 3000K, 3500K and 4000K
- Recessed form factor fits most T-grid ceiling systems



1'x2'




2'x2'

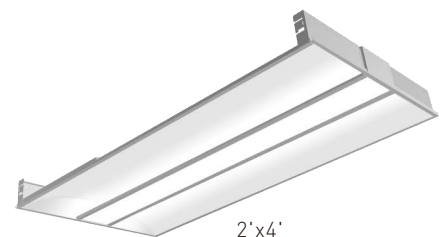

2'x4'

US PATENT
US D921,955 S



PERFORMANCE

Model NO.	Dimension	Wattage Selectable	Lumen @4000K	Efficacy@4000K	CCT Adjustable
TT22-DM-04W	2'x2'	40W/30W/20W	Up to 4400lm	110lm/w	3000K/3500K/4000K
TT24-DM-04W	2'x4'	50W/40W/30W	Up to 5500lm		
TT12-DM-04W	1'x2'	20W/15W/10W	Up to 2300lm	115lm/w	

Lumen output may vary by ±5% based on different CCT and wattage settings. Actual wattage may also vary by ±5%.

Floating Air Troffer

CCT & Wattage Adjustable Version



PRODUCT ORDERING GUIDE

Example: TT22-DM-04W


TT		DM	04	W
Product Series	Size	0-10V Dim	CCT	Wattage
TT Floating Air LED Troffer	22 QuickShip 2'X2', Up to 4400lm Wattage Selectable (40W, 30W, 20W)	DM QuickShip 110-277V AC Dims to 10% or 1%	04 QuickShip CCT Adjustable 3000K, 3500K, 4000K	W QuickShip Wattage Selectable
	24 QuickShip 2'X4', Up to 5500lm Wattage Selectable (50W, 40W, 30W)			
	12* 1'X2', Up to 2300lm Wattage Selectable (20W, 15W, 10W)			

*Additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.

OPTIONAL ORDERING GUIDE

Optional 0-10V Dimming	Optional Functions
D10 QuickShip 110-277V AC, Dims to 10% (Standard) <i>Tested Dimmers: Lutron® Diva-Dvfv, Leviton® IP-710-DL.</i>	EME QuickShip Emergency - External Only external 8w or 25w LED emergency driver with standard indicator available and need field-installed.
D01 QuickShip 110-277V AC, Dim to 1%	EMI QuickShip Emergency - Built-in Built-in 8W LED emergency driver and indicator before delivery.
	OCC* Sensor - Built-in* We can provide a factory-installed integrated sensor system for multi-level control based on motion and/or daylight contribution. For more info or spec sheet, please contact sales.

DIMENSION

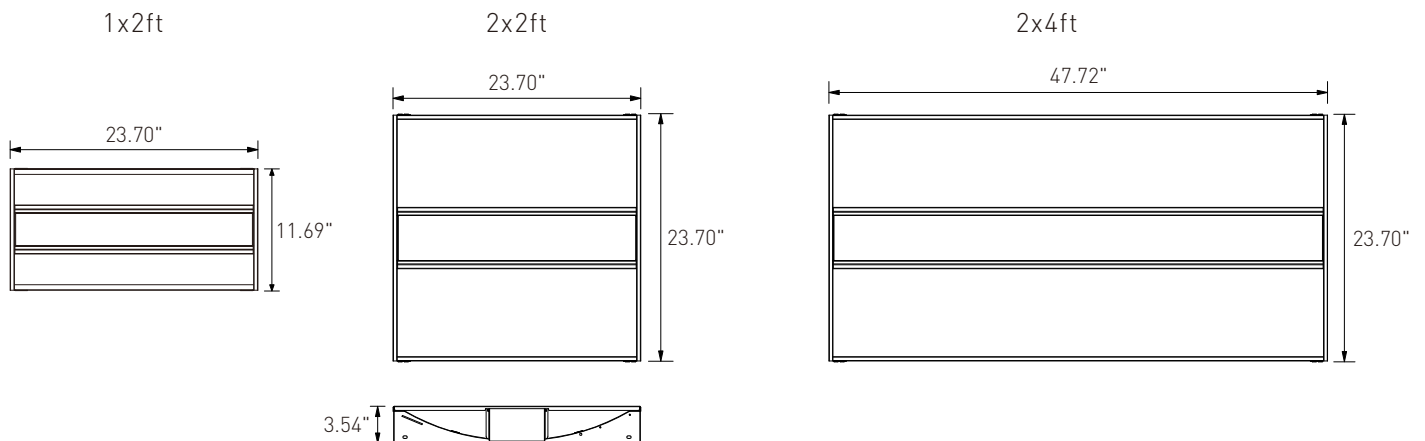

Floating Air Troffer

CCT & Wattage Adjustable Version



PRODUCT PERFORMANCE

▶ Optics

It offers unique transparent optics to enhance the fixture aesthetic. fully- uniform transparent optics provide uniform, low-glare illumination for a clean, modern, upgraded look, creating direct and indirect light distribution.



▶ Construction

Extruded aluminum housing.

▶ Finish

Powder coat white finish provides uniform finish providing long term performance and superior aesthetic.

▶ Electrical

LED Driver It is powered by Class 2 high efficiency LED driver, with a standard 1-10V dimming which continuous dims to 10% that works with many types of controls. Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL. Dim to 1% is available.

THD <20%
Power Factor >0.9

Input Voltage Standard electronic drivers are cULus recognized and available for 110-277V.

▶ LED System

CRI Minimum 80 color rendering index
CCT CCT adjustable from 3000K, 3500K and 4000K with a great color consistency

LED Life Minimum 50,000h with 87.8% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.

Thermal Management Aluminum housing acting as the heat sink to maximize life.

Environment Damp rated in operating ambient temperatures of -20°C-40°C.

▶ T-grids Ceiling Compatibility

It is architectural recessed lighting solution that compatible with most 15/16" and 9/16" t-grid systems for commercial and institutional environment.

▶ Mounting


Recessed

▶ Approvals

- US Patent (US D921,955 S)
- cULus listed for damp locations
- Tested to IESNA LM-79 and LM-80
- DesignLights Consortium Qualified and classified for DLC Standard, refer to www.designlights.org for details
- 5-year Limited Warranty

DISTRIBUTION DIAGRAM

2'x2' / 3500K

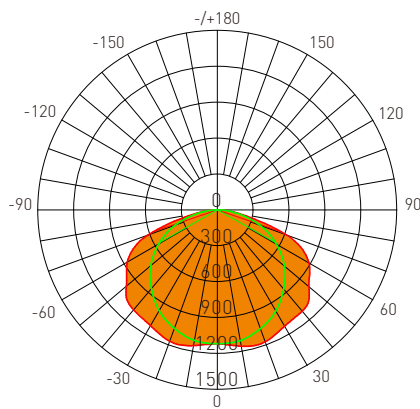

Lumens: 4176.3 Lm
Watts: 37.54 W
LPW: 111.25 Lm/W
CCT: 3500K

UNIT: cd
— C0/180,142.4
— C90/270,120.9

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
10	1157	1135	1109	1132	1152
20	1173	1137	1056	1130	1168
30	1124	1084	977.9	1075	1118
40	1105	998.6	863.3	985.1	1090
50	999.8	923.2	733.5	902.0	992.9
60	883.4	772.7	570.2	758.8	868.6
70	615.3	567.1	381.9	552.9	618.6
80	191.9	213.5	168.0	217.0	190.9
90	1.700	1.859	1.366	1.957	2.187
100	2.024	1.918	1.081	1.844	1.101
110	3.018	2.687	1.908	2.654	1.854
120	3.523	2.799	2.082	2.732	1.920
130	3.279	2.414	2.692	2.378	1.938
140	2.295	1.607	2.463	1.499	1.956
150	2.206	0.8639	2.039	0.9721	1.678
160	1.662	0.8615	2.106	1.014	1.721
170	1.850	1.026	2.062	1.154	1.711
180	1.683	1.091	2.463	1.269	1.680
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

T	Φ total
0-10	107.6
10-20	428.0
20-30	935.2
30-40	1579
40-50	2310
50-60	3044
60-70	3686
70-80	4070
80-90	4164
90-100	4166
100-110	4168
110-120	4170
120-130	4172
130-140	4174
140-150	4175
150-160	4176
160-170	4176
170-180	4176
	UNIT: lm

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	10615	8417
80	11061	9663
75	14172	10589
70	18004	11156
65	18637	11393
60	17682	11393
55	16434	11394
50	15566	11400
45	15284	11333


Floating Air Troffer

CCT & Wattage Adjustable Version



DISTRIBUTION DIAGRAM

2'x4' / 3500K

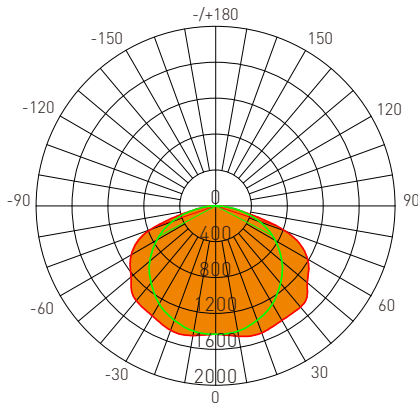

AVERAGE BEAM ANGLE(50%): 133.4°

Lumens: 5460.4 Lm
Watts: 48.81 W
LPW: 111.87 Lm/W
CCT: 3500K

UNIT: cd
— C0/180,142.8
— C90/270,124.1

Zonal Flux Diagram

τ	C0	C45	C90	C135	C180
10	1476	1453	1419	1442	1467
20	1506	1462	1356	1431	1475
30	1475	1412	1264	1363	1415
40	1472	1332	1124	1261	1380
50	1334	1257	965.4	1162	1233
60	1183	1052	764.1	969.1	1087
70	829.5	785.9	526.3	724.8	776.3
80	233.4	277.8	238.8	270.1	223.4
90	1.578	2.350	14.28	2.462	1.629
100	1.451	2.109	2.911	2.214	1.815
110	2.116	2.843	2.507	2.676	2.042
120	2.355	2.863	1.316	2.762	2.115
130	2.238	2.051	1.134	1.924	1.950
140	1.839	1.085	0.9668	0.8426	1.870
150	1.415	0.7827	0.9557	0.7437	1.752
160	1.088	0.7829	1.002	0.7228	1.633
170	1.312	0.8800	1.262	0.9410	1.667
180	1.390	0.9644	1.314	1.081	1.632
DEG	LUMINOUS INTENSITY:cd				


Zonal Lumens

τ	φ total
0-10	137.5
10-20	546.5
20-30	1197
30-40	2032
40-50	2987
50-60	3952
60-70	4807
70-80	5325
80-90	5448
90-100	5451
100-110	5454
110-120	5456
120-130	5458
130-140	5459
140-150	5459
150-160	5460
160-170	5460
170-180	5460
DEG	UNIT: lm

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	11179	12390
80	13456	13747
75	18946	14805
70	24285	15384
65	24922	15466
60	23686	15279
55	22066	15111
50	20773	15016
45	20368	14854

1'x2' / 4000K

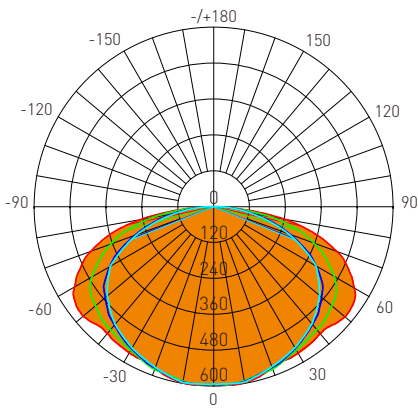

AVERAGE BEAM ANGLE(50%): 144.5°

Lumens: 4176.3 Lm
Watts: 37.54 W
LPW: 111.25 Lm/W
CCT: 3500K

UNIT: cd
— C0/180,155.7 deg
— C90/210,149.4 deg
— C0/240,137.1 deg
— C90/270,135.9 deg

Zonal Flux Diagram

τ	C0	C45	C90	C135	C180
5	598.3	596.0	594.1	595.6	598.1
10	597.1	590.8	595.6	592.1	597.9
15	589.2	578.4	582.5	579.6	589.4
20	571.8	572.3	569.4	572.8	573.7
25	565.8	561.5	556.6	562.8	564.9
30	565.0	545.2	543.9	546.6	564.7
35	560.7	534.3	527.4	534.7	559.5
40	554.0	523.7	511.0	524.7	553.5
45	559.9	504.6	486.7	506.3	556.2
50	573.5	490.3	462.4	491.5	570.0
55	568.8	461.3	428.4	463.4	563.9
60	542.7	419.5	394.5	423.8	537.3
65	497.8	363.4	331.1	368.2	493.4
70	439.0	301.1	267.8	306.0	438.4
75	352.9	230.4	195.7	238.1	360.1
80	238.4	145.7	123.7	154.9	249.9
85	88.96	67.74	62.92	75.10	106.8
90	1.881	2.390	2.174	2.472	2.556
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

τ	φ total
0-10	14.23
10-20	56.84
20-30	126.6
30-40	222.0
40-50	341.3
50-60	482.4
60-70	642.7
70-80	820.7
80-90	1015
90-100	1221
100-110	1435
110-120	1650
120-130	1855
130-140	2040
140-150	2195
150-160	2310
160-170	2376
170-180	2395
DEG	UNIT: lm

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	5734	4056
80	7712	4001
75	7659	4248
70	7211	4398
65	6618	4402
60	6098	4432
55	5571	4196
50	5012	4041
45	4449	3867


Floating Air Troffer

CCT & Wattage Adjustable Version



OCC* MICROWAVE SENSOR OPTION-BUILT-IN


We can provide a factory-installed integrated sensor system (Line Voltage Daylight Harvest / Bi-Level) for multi-level control based on motion and/or daylight contribution. For more info or spec sheet, please contact sales.

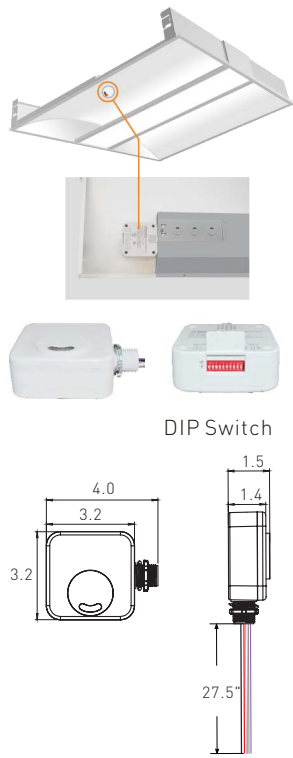

Specifications


Operating Voltage	120/277VAC, 50Hz/60Hz
Switching Capacity	Resistive/Halogen-800W/1200@120/277V Fluorescent Ballast-660W/1200@120/277V Electronic Ballast(LED/CFL)-5A/5A@120/277V
Stand-by Power	≤0.5W
Detection Area	20%/50%/75%/100%
Hold Time	10s/1min/5min/10min/15min/20min/30min/60min
Daylight Threshold	10Lux/30Lux/50Lux
Stand-by Period	1min/30min/60min/+∞
Stand-by Dimming Level	0%/10%/30%/50%
Microwave Frequency	5.8GHz±5MHz
Microwave Power	<0.2mW
Mounting Height	Max.6m
Detection Range	Max.8m
Control Line	VIOLET+,GRAY-,RED L' Out, WHITE N, BLACK L in
Operating Temperature	-40°C~+70°C
IP Rating	IP20
Detection Angle	360°

Detection Pattern

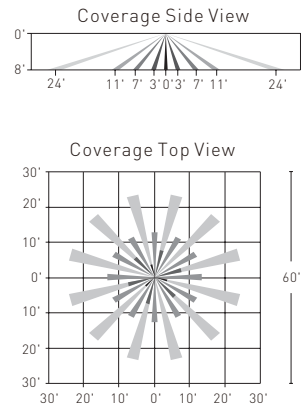

EMI EMERGENCY OPTION - BUILT-IN

Built-in 8W LED emergency driver and indicator before delivery. Up to 120 minutes in event of power failure.

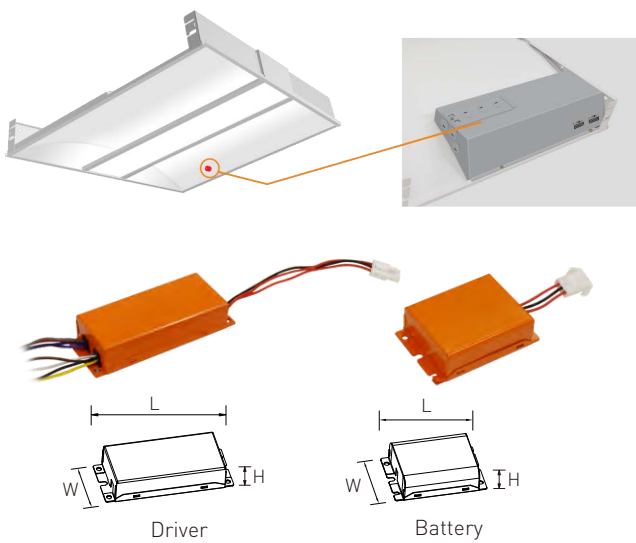

Specifications



Output Power	8 Watts
Output Voltage	15-54V DC
Input Current	70 mA (Max)
Input Power	3.2 Watts (Max)
Input Voltage	100-277VAC, 50-60Hz
Emergency Operation	≥90 Minutes
Standby Power	<0.4W
Operating Temp	0°C to 50°C
Battery	Lithium
Recharge	24 Hrs
Compatible LED Luminaire	LED Driver Output Current: 5A Max
Dimensions	Driver: L5.08"xW2.05"xH0.99", Battery: L3.47"xW2.33"xH0.97"
Certificate	UL, CEC
Output Class	UL LELV (Output protection self-resetting)

Model		L	W	H
EM-S0854-LBN	Driver	5.08	2.05"	0.99"
	Battery	3.47"	2.33"	0.97"